


# TERMINAL HEPA FILTER (WITHOUT DIVIDER)

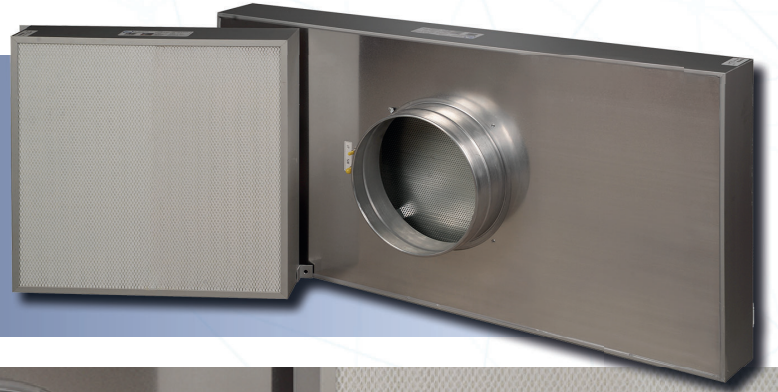


## Applications:

Final filter for cleanrooms  
Life science  
Microelectronics  
Food & Beverages

## Highlights:

- Self-contained air inlet, no additional housing required
- $\Delta Pa$  and %100 DOP nozzles exist (accessible from technical side)
- High quality glass fiber media
- Guaranteed leak free
- Individual test certificate (acc. to EN 1822 - ISO 29463)
- Optimized velocity distribution

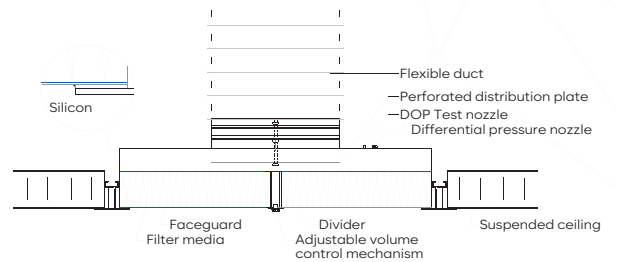

Filter Standard:	EN 1822 and ISO 29463	Max. Operating Temperature:	80°C
Filter Class:	H13 - H14 - U15	Faceguard:	Aluminium sheet (powder coated)
Media:	High quality glass fiber	Sealing Compound:	Two component polyurethane
Frame:	Anodized extruded aluminium	Seperator:	Hotmelt
Rec. Final Pressure Drop:	Initial pressure drop x2, (max. 600 Pa)		




## TERMINAL HEPA FILTER (WITHOUT DIVIDER/125)

Filter Model	Filter Class		Dimensions WxHxD (mm)	Spigot Diameter (mm)	Filtration Area (m <sup>2</sup> )	Pleat Height (mm)	Nominal Airflow (m <sup>3</sup> /h)	Initial Pressure Drop (Pa)
	EN 1822	ISO 29463						
HTH-H13-1-305-305-125-C-FC-W	H13	ISO 35 H	305x305x125	160	2,8	50	150	90
HTH-H13-1-305-610-125-D-FC-W	H13	ISO 35 H	305x610x125	200	5,5	50	300	90
HTH-H13-1-457-457-125-D-FC-W	H13	ISO 35 H	457x457x125	200	6,2	50	340	90
HTH-H13-1-610-610-125-D-FC-W	H13	ISO 35 H	610x610x125	200	11,0	50	600	90
HTH-H13-1-610-915-125-M-FC-W	H13	ISO 35 H	610x915x125	250	16,5	50	900	90
HTH-H13-1-610-1220-125-M-FC-W	H13	ISO 35 H	610x1220x125	250	22,0	50	1200	90
HTH-H14-1-305-305-125-C-FC-W	H14	ISO 45 H	305x305x125	160	2,8	50	150	115
HTH-H14-1-305-610-125-D-FC-W	H14	ISO 45 H	305x610x125	200	5,5	50	300	115
HTH-H14-1-457-457-125-D-FC-W	H14	ISO 45 H	457x457x125	200	6,2	50	340	115
HTH-H14-1-610-610-125-D-FC-W	H14	ISO 45 H	610x610x125	200	11,0	50	600	115
HTH-H14-1-610-915-125-M-FC-W	H14	ISO 45 H	610x915x125	250	16,5	50	900	115
HTH-H14-1-610-1220-125-M-FC-W	H14	ISO 45 H	610x1220x125	250	22,0	50	1200	115
HTH-U15-1-305-305-125-C-FC-W	U15	ISO 55 U	305x305x125	160	2,8	50	150	135
HTH-U15-1-305-610-125-D-FC-W	U15	ISO 55 U	305x610x125	200	5,5	50	300	135
HTH-U15-1-457-457-125-D-FC-W	U15	ISO 55 U	457x457x125	200	6,2	50	340	135
HTH-U15-1-610-610-125-D-FC-W	U15	ISO 55 U	610x610x125	200	11,0	50	600	135
HTH-U15-1-610-915-125-M-FC-W	U15	ISO 55 U	610x915x125	250	16,5	50	900	135
HTH-U15-1-610-1220-125-M-FC-W	U15	ISO 55 U	610x1220x125	250	22,0	50	1200	135

"Other dimensions are available on request."  
"Differential Pressure Tolerance ±10%"

## TERMINAL HEPA FILTER (WITHOUT DIVIDER) CODE CONFIGURATION

Filter Type	Filter Class	Pleat Height	Dimensions (mm)	Spigot Diameter	Faceguard	Gasket
HTH : Terminal HEPA Filter without Divider	H13 H14 U15	1: 50 mm 6: 100 mm	610x610x125	A: 125 B: 150 C: 160 D: 200 M: 250 F: 300 L: 315 X: 355 Z: Special	FC: On Clean Side	P: Continuous Pu Foam

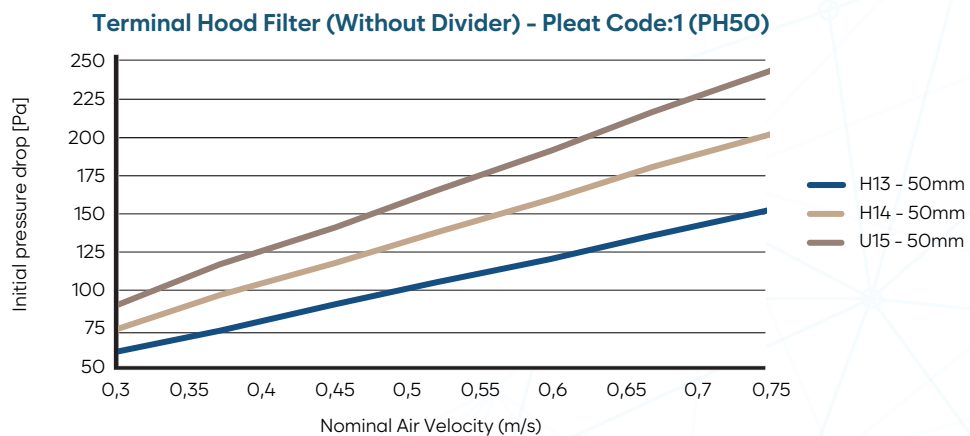

## TERMINAL HEPA FILTER (WITHOUT DIVIDER/175)

Filter Model	Filter Class		Dimensions WxHxD (mm)	Spigot Diameter (mm)	Filtration Area (m <sup>2</sup> )	Pleat Height (mm)	Nominal Airflow (m <sup>3</sup> /h)	Initial Pressure Drop (Pa)
	EN 1822	ISO 29463						
HTH-H13-6-305-305-175-C-FC-W	H13	ISO 35 H	305x305x175	160	4,5	100	150	65
HTH-H13-6-305-610-175-D-FC-W	H13	ISO 35 H	305x610x175	200	9,0	100	300	65
HTH-H13-6-457-457-175-D-FC-W	H13	ISO 35 H	457x457x175	200	10,1	100	340	65
HTH-H13-6-610-610-175-D-FC-W	H13	ISO 35 H	610x610x175	200	18,0	100	600	65
HTH-H13-6-610-915-175-M-FC-W	H13	ISO 35 H	610x915x175	250	27,0	100	900	65
HTH-H13-6-610-1220-175-M-FC-W	H13	ISO 35 H	610x1220x175	250	36,0	100	1200	65
HTH-H14-6-305-305-175-C-FC-W	H14	ISO 45 H	305x305x175	160	4,7	100	150	80
HTH-H14-6-305-610-175-D-FC-W	H14	ISO 45 H	305x610x175	200	9,4	100	300	80
HTH-H14-6-457-457-175-D-FC-W	H14	ISO 45 H	457x457x175	200	10,5	100	340	80
HTH-H14-6-610-610-175-D-FC-W	H14	ISO 45 H	610x610x175	200	18,8	100	600	80
HTH-H14-6-610-915-175-M-FC-W	H14	ISO 45 H	610x915x175	250	28,2	100	900	80
HTH-H14-6-610-1220-175-M-FC-W	H14	ISO 45 H	610x1220x175	250	37,6	100	1200	80
HTH-U15-6-305-305-175-C-FC-W	U15	ISO 55 U	305x305x175	160	5,0	100	150	100
HTH-U15-6-305-610-175-D-FC-W	U15	ISO 55 U	305x610x175	200	10,0	100	300	100
HTH-U15-6-457-457-175-D-FC-W	U15	ISO 55 U	457x457x175	200	11,2	100	340	100
HTH-U15-6-610-610-175-D-FC-W	U15	ISO 55 U	610x610x175	200	20,0	100	600	100
HTH-U15-6-610-915-175-M-FC-W	U15	ISO 55 U	610x915x175	250	30,0	100	900	100
HTH-U15-6-610-1220-175-M-FC-W	U15	ISO 55 U	610x1220x175	250	40,0	100	1200	100

"Other dimensions are available on request."  
"Differential Pressure Tolerance ±10%"

